



## i-LEVEL Capacitive Filling Level Probe - KFW

### 1 Limit value switching point

- Integrated evaluation electronics
- Easy Teach by wire
- Housing material: GFK, Ø 16 mm
- Automatic identification of NPN / PNP function



#### Technical data

Active zones [M]	370 mm
Electrical version	4 - wire DC
Output function	1 limit value switching point, normally open
<b>Type</b>	<b>KFW-51-500-370-GFK-D16-S-ETW-Z02</b>
<b>Art.-No.</b>	<b>KW 0034</b>
Operating voltage (U <sub>B</sub> )	15...30 V DC
Permitted residual ripple max.	5 %
Output current max.	100 mA
Power consumption (outputs no-load)	0,9 W
Frequency of operating cycles max.	1 Hz
Permitted ambient temperature	-25...+70 °C
LED-Display	Green
Protective circuit	Built-in
Degree of protection IEC 60529	IP 67
Norm	EN 60947-5-2*
Connection cable	2 m, PVC, 5 x 0.34 mm <sup>2</sup>
Housing material	GFK
Active zone	GFK
Lid	PC (FDA 21 CFR 177.1580)




**Accessories** for mounting (not delivered with the probe) please see our selection of accessories.

\*Where applicable

#### EasyTeach chart:

LED green / Adjustment function

- Adjustment
- Factory set
- Test

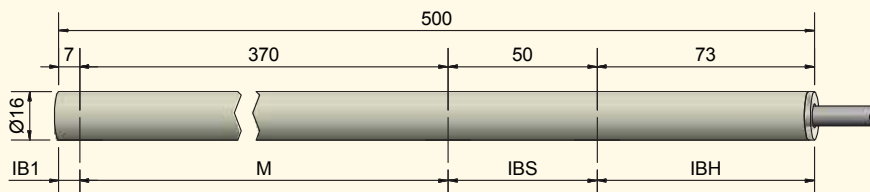

Other housing materials for the active zone (probe), like PE, PTFE, PVDF or PEEK on request.

Made in Germany

All specifications are subject to change without notice. (05/2018)