

ADF

P300, 90 – 360 A Active Dynamic Filter



- High Performance and Reliability
- Modular and Scalable Design 90 – 360 A
- Advanced Digital Control
- Easy Installation
- Insensitive to Network Conditions
- Harmonic Elimination
- Total Power Factor Correction
- Active Load Balancing
- Dynamic VAR compensation
- Non-overloadable
- Available in 208 – 480 V and 480 – 690 V versions



COMSYS
Creating Value through Power Quality™


Technical Specifications

Model	ADF P300-120/480 (ADF P300-90/690)	ADF P300-240/480 (ADF P300-180/690)	ADF P300-360/480 (ADF P300-270/690)
Rated power *	83 / 100 / 94 / 108 kVA	166 / 200 / 187 / 215 kVA	249 / 299 / 281 / 323 kVA
Compensation current capacity at 50/60 Hz	120 A _{RMS} (90 A _{RMS})	240 A _{RMS} (180 A _{RMS})	360 A _{RMS} (270 A _{RMS})
System voltage **	480 V (208 – 480 V), 690 V (480 – 690 V)		
Nominal frequency **	50/60 Hz ± 2 %		
Number of phases	3 phase 3 wire		
Connection type	3 phase without neutral (TN, TT, IT)		
Harmonic current compensated	individual compensation up to 49 th order		
Rate of harmonic reduction	better than 98 %		
Current compensation of cos φ	up to 1.0		
Expandability	ADF P300 units can be used in parallel		
Response time	< 1 ms		
Power dissipation 480 V (690 V)	< 2725 W (< 2969 W)	< 5325 W (< 5813 W)	< 7925 W (< 8657 W)
Maximum air flow requirement	600 m ³ /h	1200 m ³ /h	1800 m ³ /h
Noise level	< 70 dB(A)		
Environment	0 to 95 % RH non-condensing, max altitude 1000 m		
Operating temperature	0 to 50 °C, up to 40 °C without derating		
Dimensions	800 x 2155 x 610 mm (W x H x D)		
Weight 480 V (690 V)	335 kg (351 kg)	472 kg (495 kg)	609 kg (639 kg)
Cabinet color	cabinet RAL 7035 (gray), base RAL 7022 (dark gray)		
Protection class	IP20 according to IEC 529		
Environmental conditions	chemical 3C3, mechanical 3S3		
Electromagnetic compatibility	EN 61000-6-2, EN 61000-6-4		
Certificates	CE		
Art no 480 V (690 V)	400 089 (400 092)	400 090 (400 093)	400 091 (400 094)


* Compensation power at 400 V / 480 V / 600 V / 690 V nominal voltage

** Please state your system voltage and line frequency when ordering

Connection Diagram (example)

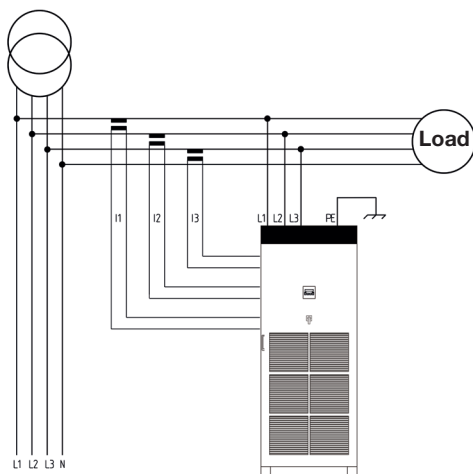

Dimensions (mm)

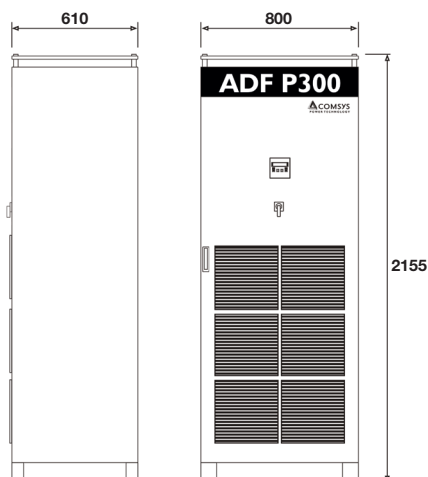

Comsys AB, Fältspatvägen 4, SE-224 78 Lund, Sweden
Tel +46 10 209 6800, Fax +46 10 209 6805
info@comsys.se www.comsys.se

Agent: