

QG65N CAN series

QG65N-KDXYh-030-CAN-C(F)M

Inclination sensor


2 axis horizontal mounting

Programmable device

Interface: CANopen

Parameters programmable
by CANopen object dictionary

Measuring range
 $\pm 30^\circ$

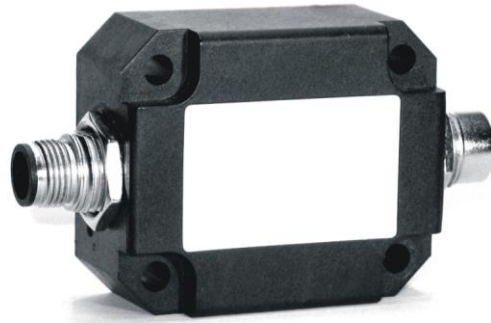

General specifications 11543/11545, v20190325

Housing	Reinforced plastic injection molded (Faradex DS, black, EMI shielded by stainless steel fiber in PC)
Dimensions (indicative)	60x50x27 mm
Mounting	4x M5x25 mm zinc plated pozidrive screws included (optional: 2x Ø4mm positioning pins)
Ingress Protection (IEC 60529)	IP67
Relative humidity	0 - 100%
Weight	approx. 110 gram
Supply voltage	8 - 30 V dc
Polarity protection	Yes
Current consumption	≤ 50 mA
Operating temperature	-40 .. +85 °C
Storage temperature	-40 .. +85 °C
Measuring range	$\pm 30^\circ$
Centering function	Yes (CANout 0 = 0°), range: $\pm 5^\circ$
Frequency response (-3dB)	0 - 20 Hz
Typ. Accuracy @20°C (2 σ)	overall 0,15° typ.
Offset error	$< \pm 0,05^\circ$ typ. ($< \pm 0,1^\circ$ max.) after centering
Non linearity	$< \pm 0,1^\circ$ typ. ($< \pm 0,2^\circ$ max.)
Sensitivity error	not applicable
Resolution	0,05°
Temperature coefficient	$\pm 0,01^\circ/\text{K}$ typ.
Max mechanical shock	10.000 g
CAN interface (hardware)	According to ISO 11898-1 & ISO 11898-2 (also known as CAN 2.0 A/B)
CANopen application layer and communication profile	CANopen protocol: EN 50325-4 (CiA 301 v4.0 & and v4.2.0)
Baud rate	125 kbit/s (default, range 50/125/250/500/1000 kbit/s)
Node Id	01h (range: 01h - 7Fh)
TPDO messages	TPDO1: 181h (for Node ID=01h)
TPDO1 event time	50 ms (default, range 10-500 ms)
Sync mode	On/off (default: off)
Heartbeat	On/off (default: on, 2s)
Programming options	Baudrate, Node Id, Event time, Sync mode, Heartbeat, Output format
Output format	Integer: -3000 to +3000 (PDO1:X=byte2,1;Y=byte4,3)
Filtering	Output filter disabled
Boot time	< 1 s
Programming options	by CANopen object dictionary (CAN parameters, filtering)

QG series



QG65N-KDXYh-030-CAN-C(F)M

CANoutput = $100 \cdot \alpha$
Clipping outside measuring range

Default 0°: horizontal (label upwards), no acceleration applied. To eliminate mounting offsets the sensor can be centered within $\pm 5^\circ$ tilt (by the CAN object dictionary)
Cross tilt sensitivity error: $< (0,12 \cdot \text{cross tilt angle})^2$ % typ.
→ one axis $< 10^\circ$ tilt for max. accuracy

Connection


Wire / pin coding

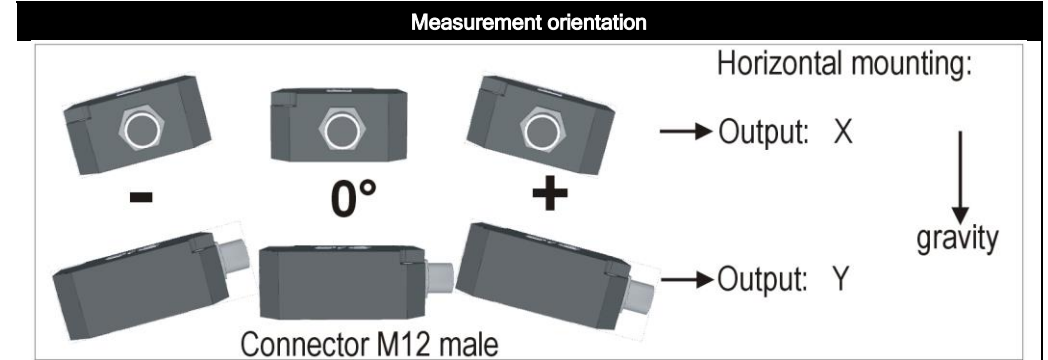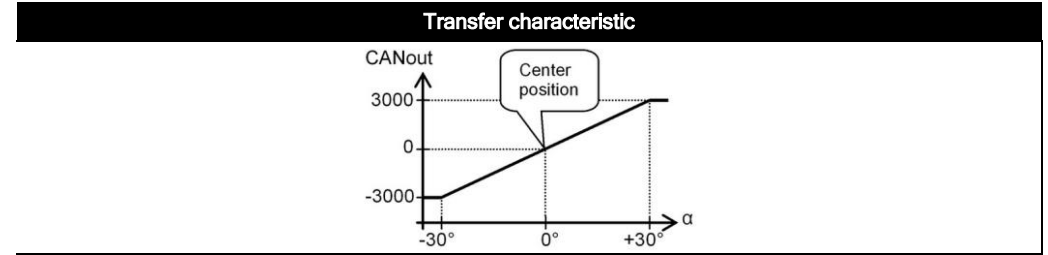

Connectivity (length $\pm 10\%$)

Male only or Male & Female (internal T-junction) M12 connector (5 pins, A-coding) (CiA303 V1.8.0) (Brass Nickel coated, contacts copper alloy)
No bus termination inside. A CANbus always has to be terminated properly. For bus termination order separate M12 termination resistor (optional: T-connector)

Pin 1:	Shield	
Pin 2:	Vcc	
Pin 3:	Gnd & CAN_GND	
Pin 4:	CAN_H	
Pin 5:	CAN_L	

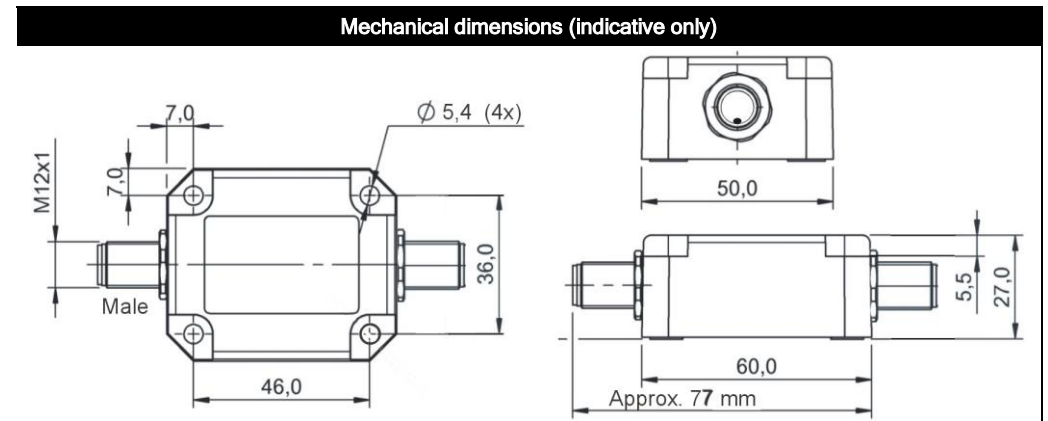

E4, CAN-manual, EDS-file, Ordering codes

This product is approved for automotive use, approval number: E4-10R-04-2889

A CAN-manual (Ftype), an EDS-file (Ftype) and a Declaratoin of conformity are available at www.dis-sensors.com, see 'downloads'

As this device is accelerometer-based the sensor is inherent sensitive for accelerations/vibrations. Application specific testing must be carried out to check whether this sensor will fulfil your requirements.

Ordering codes:
M12 Male: QG65N-KDXYh-030-CAN-CM, 11543
M12 Male & Female: QG65N-KDXYh-030-CAN-CFM, 11545