

## SAFEREADY SFRD4 1509 X

Order Code: 1070329

Body Detection Type 4 Safety Light Curtain. Standard Version. With Automatic/Manual Restart and EDM



**Safety level**  
Type 4 - PL e

**Protected height (mm)**  
1510

**Resolution (mm)**  
90

**Max. range (m)**  
18

**Restart**  
Built-in - User selectable automatic or manual

**Functioning system**  
Emitter / Receiver

## Technical Description

Compact Safety Light Curtain: Type 4, SIL 3, SILCL 3, PL e, Cat. 4

Cross Section: 28 x 33 mm

No blind area on both side

Hardware configuration: no programming necessary, easy to install and replace

Connection and configuration through M12 pig-tail connectors

Start / Restart manual or automatic with EDM monitoring

Unshielded cables up to 100 m can be used to connect the Safety Light Curtain

What's in the Box: Emitter, Receiver and Standard Fastening Brackets

## SAFEREADY SFRD4 1509 X

## Features

Safety level	Type 4 - PL e
Protected height (mm)	1510
Resolution (mm)	90
Controlled height (mm)	1500
Max. range (m)	18
Restart	Built-in - User selectable automatic or manual
Functioning system	Emitter / Receiver
Safety level (SIL / PL)	Type 4 - SIL 3 - Max SIL 3 - SL 2 - PL e - Cat. 4
Operating temperature (°C)	- 30 ... 55
Number of beams	20
Max. length of the connection cables (m)	100
Signalling	LEDs and top LED cap for light curtain's status and diagnostics
Safety output type	2 fail-safe PNP (400 mA at 24 VDC) with protection against short circuit, overload and reverse polarity
Connections	M12 5-pole male pigtail connector (emitter), M12 8-pole male pigtail connector (receiver)
MTTFD (ISO13849) years	20
Safety outputs	2 OSSD PNP (400 mA at 24 VDC)
Storage temperature (°C)	- 30 ... 70
Relative humidity	50% @ 70 °C / 90% @ 20 °C
Safety functions	Integrated

**SAFEREADY SFRD4 1509 X**

Detection	Body
Operating Range (m)	Selectable: 0 ... 8 m - low range / 5 ... 18 m - high range
Protective enclosures	None
Product class	B

## Electrical data


Power supply (VDC)	24 ± 20%
--------------------	----------

## Mechanical data

Beam spacing (mm)	80
Overall height (mm)	1518
Cross section dimensions (mm)	28 x 33
Degree of protection	IP65 - IP67
Fastening	Back slot with set of brackets (included)

## Technical drawings

A1 (Controlled height) = 1500 mm  
A (Overall height) = 1518 mm

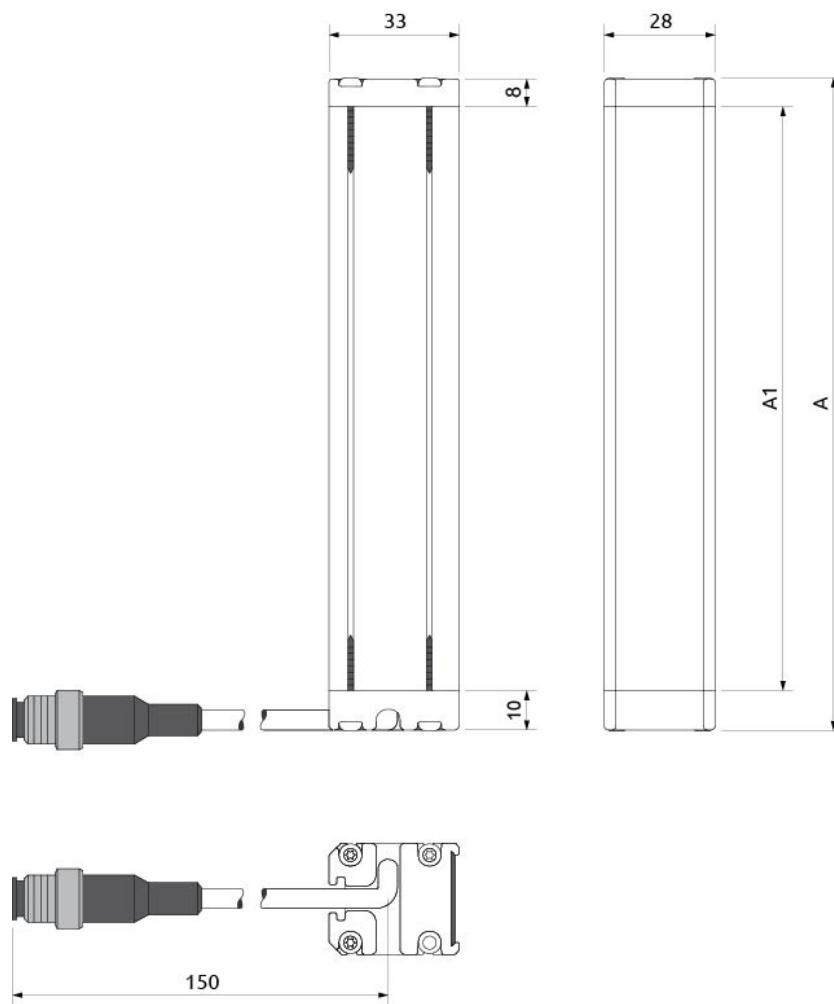

## Certificates

