

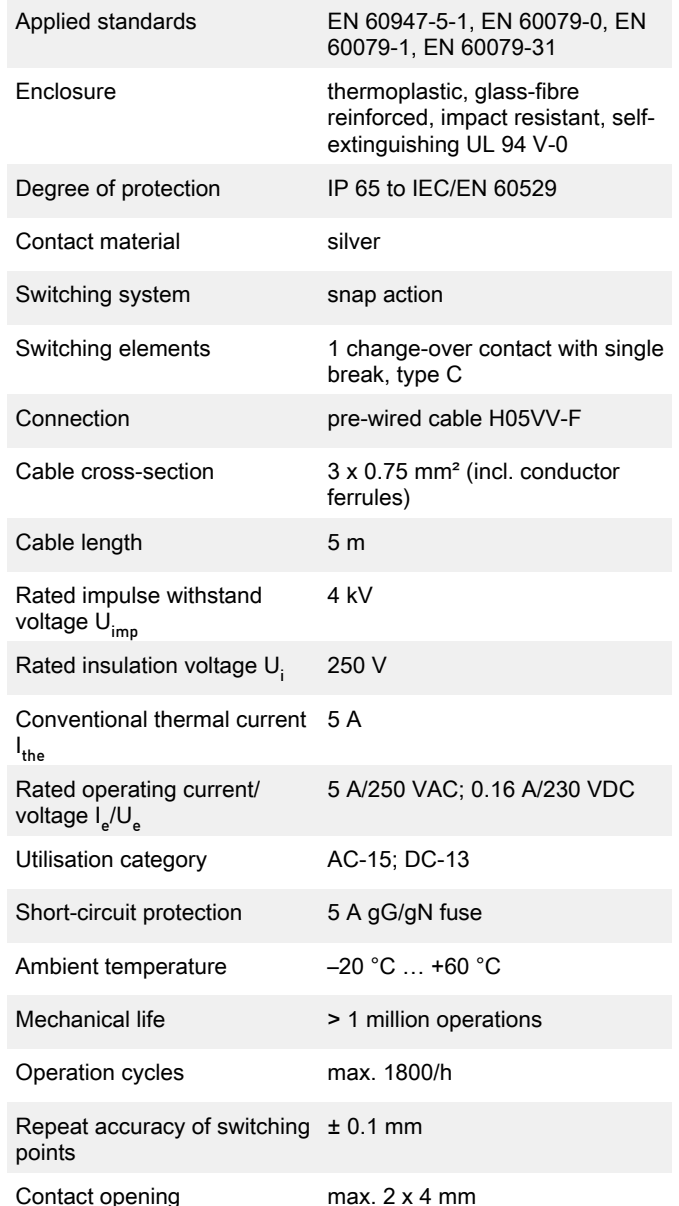


ExM 14 VKU - 5m

Features/Options:

- Actuator: Vertical ball plunger VKU
- Actuation from any direction
- Actuating speed max. 0.5 m/s with an actuating angle of 20°
- Actuator with captive stainless steel ball
- Attention: Please state required international approvals with your order!

Technical data

Page: 1 / 2
Printed: 13.10.2022



Ex position switch

ExM 14 VKU - 5m

Material number: 1045683 (Material number old: 14762305)

Technical data

Ex marking

⊕ II 2G Ex d IIC T6 Gb,
⊕ II 2D Ex tb IIIC T80 °C Db
IP65

Approvals

PTB 03 ATEX 1069 X

ERL

Weight

400 g

Contact diagram

BK 4 —
BN 2 — 1 GY

Switching diagram

