



## Foot switch with thermoplastic enclosure


KF 1PW - 2m

Material number: 1049149 (Material number old: 88131004)


### Features/Options:

- Thermoplastic enclosure
- Small flat design
- Micro switches (1-pole change over contact) for current load up to 5 A
- With pre-wired cable

### Dimensions

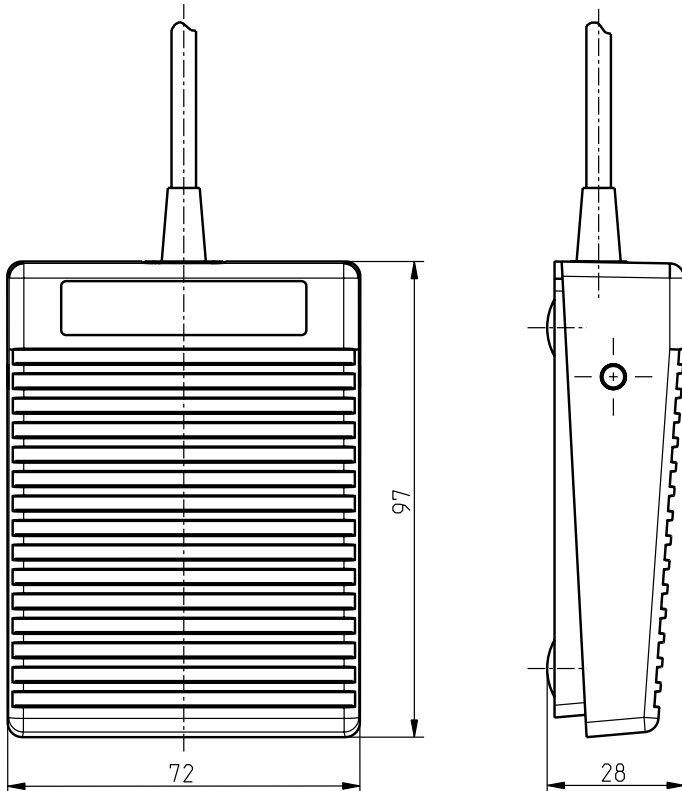

### Technical data

|                          |   |
|--------------------------|---|
| Applied standards        | EN 60947-5-1  |
| Enclosure                | thermoplastic, glass-fibre reinforced, impact resistant, self-extinguishing UL 94 V-0 |
| Pedal                    | thermoplastic, glass-fibre reinforced, impact resistant, self-extinguishing UL 94 V-0 |
| Degree of protection     | IP 65 to IEC/EN 60529   |
| Connection               | cable 3 x AWG 20  |
| Cable length             | 2 m   |
| Cable diameter           | 4.8 mm $\pm$ 3%   |
| Cable cross-section      | 3 x 0.52 mm <sup>2</sup>  |
| Switching system         | micro switch  |
| Switching elements       | 1-pole change-over contact  |
| Switching voltage        | 12 ... 250 VAC/DC   |
| Switch-on current        | max. 5 A  |
| Switch-on power          | max. 1250 VA  |
| Short-circuit protection | 5 A gG/gN fuse  |
| Ambient temperature      | -10 °C ... +60 °C   |
| Mechanical life          | > 1 million operations  |
| Approvals                |  |
| Weight                   | 220 g   |

Errors and omissions excepted.



Foot switch with thermoplastic enclosure

KF 1PW - 2m

Material number: 1049149 (Material number old: 88131004)

Contact diagram

