



## Wireless receiver

RF Rx SW915-1W 24 VAC/DC

Material number: 1190428 (Material number old: 90590024)

### Features/Options:


- sWave® wireless technology
- 1 potential-free relay output
- 1 change-over contact, max. 6 A

### Notes

- External antenna always required for optimum wireless range

- Transmitter/receiver assignment by teaching mode
- LEDs for indication of switching state
- SMA reverse plug-in connector for external antenna

### Dimensions

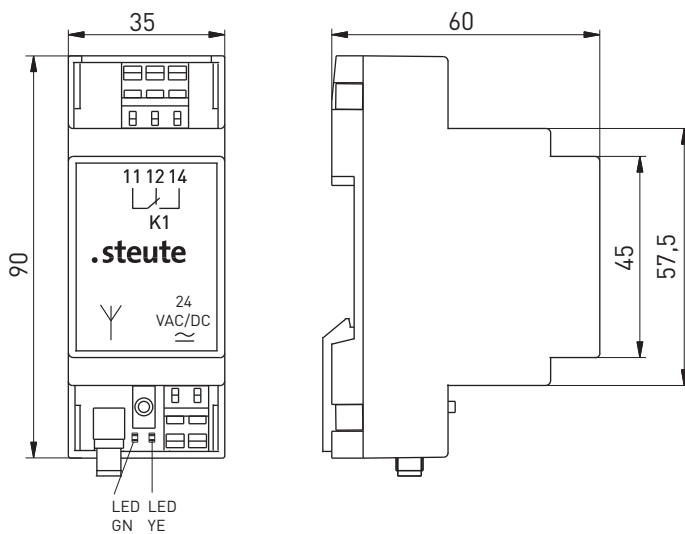

### Technical data

Applied standards	EN 60947-5-1, EN 61000-6-2, EN 61000-6-3, EN 301 489-1, EN 301 489-3, EN 300 220-2, EN 55011, EN 55032
Enclosure	polycarbonate, RAL 7035
Degree of protection	IP 20 to IEC/EN 60529
Frequency	915 MHz (USA, Canada, Mexico, Australia)
Mounting	DIN rail mounting
Connection	terminals with CAGE CLAMP WAGO Series 236: 0.08 ... 2.5 mm <sup>2</sup> / AWG 28-12, AWG 12: THHN, THWN, stripping length 5 ... 6 mm / 0.22 in
Outputs	1 change-over contact (relay)
Rated operating current/voltage $I_e/U_e$	max. 0.03 A/24 VDC -15 % ... +10 %; max. 0.07 A/24 VAC -15 % ... +10 %; output contacts: 6 A/250 VAC; 2 A/24 VDC
Utilisation category	outputs: at 10 % $I_e$ : AC-15; DC-13
Rated insulation voltage $U_i$	250 VAC
Rated impulse withstand voltage $U_{imp}$	2.5 kV
Display	green LED: ready for operation, orange LED: signalling of switching state
Transmitter per relay output	max. 40
Operation cycles	max. 12000 telegrams with repetitions/h
Degree of pollution	2
Ambient temperature	0 °C ... +55 °C

Errors and omissions excepted.




## Wireless receiver

RF Rx SW915-1W 24 VAC/DC

Material number: 1190428 (Material number old: 90590024)

### Technical data

Storage and shipping temperature	-25 °C ... +85 °C
Note	Inductive loads (contactors, relays etc.) are to be suppressed by suitable circuitry.
Wireless approvals	USA: FCC - XK5-RFRXSW915 Canada: IC - 5158A-RFRXSW915 Mexico: IFT - RCPSTRF17-1886
Approvals	
Weight	66 g

### Arrangement of receiver and switch antenna



- A = Optimum mounting
- B = Possible mounting
- C = Unsuitable mounting