

Part number

CX 02 HF



Female modular insert, Mixo series, crimp connection, 2 poles, 2 modules, 16 A
2900/5000 V 15 kV 3, with heat-shrinking tube

Product description

Product type	Modular insert
Series	Mixo
Connection type	Crimp connection
Gender	Female
N. of poles	2 poles
Size	2 modules
Specification	With heat-shrinking tube

Technical data

Current	16 A
Voltage	2900 - 5000 V
Rated impulse withstand voltage	15 kV
Pollution degree	3
Rated voltage according to UL/CSA	600V
IP degree of protection	IP20 without enclosure, IP65/IP66/IP68/IP69 with enclosure

Further technical details

Characteristics according to EN 61984	16A 2900/5000V 15kV 3
Insulation resistance	$\geq 10 \text{ G}\Omega$
Contact resistance	$\leq 1 \text{ m}\Omega$
Weight	53,00 g
Operating temperature range (min, max)	-40 °C ... +125 °C
UL 94 flammability rating	V-0

Material properties

Main material	Polycarbonate
Colour	RAL 7032 grey
RoHs conformity	Compliant
China RoHs - EFUP	E
REACH SVHC substances	No

Approvals / Standards

Reference standard	EN 61984:2009-06
Certifications	CQC, DNV, BV

General ordering information

EAN13 code	8015747150385
eCl@ss 8.1	27440205
ETIM 7.0	EC000438

Packaging Information

Sub-packaging weight	0,05 kg
Sub-packaging description	Plastic bag
Sub-packaging quantity	1 Pcs
Sub-packaging EAN barcode	8015747167895



Part number

CX 02 HF




Catalogue drawings

CX 02 HM

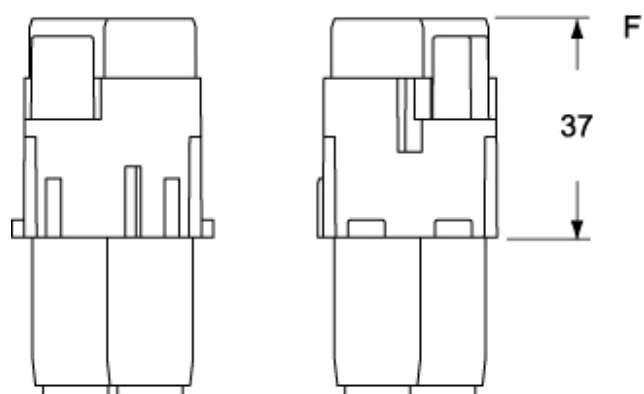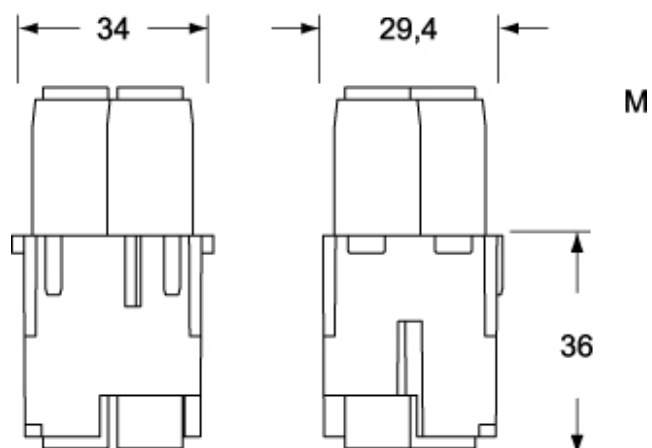

CX 02 HM

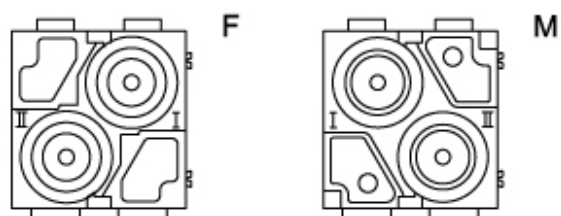

Notes

Dimensions shown in mm are not binding and may be changed without notice.