

Part number

CX 04 BM



Male modular insert, Mixo Bus series, coaxial,
4 poles, 10 A 50 V 0,8 kV 3, shielded

Product description		Material properties	
Product type	Modular insert	Main material	Polycarbonate
Series	Mixo Bus	Colour	RAL 7032 grey
Connection type	Coaxial	RoHs conformity	Compliant
Gender	Male	China RoHs - EFUP	E
N. of poles	4 poles	REACH SVHC substances	No
Specification	Shielded	Approvals / Standards	
Technical data		Reference standard	EN 61984:2009-06
Current	10 A	Certifications	CSA, DNV, BV, EAC
Voltage	50 V	UL	ECBT2
Rated impulse withstand voltage	0,8 kV	cUL	ECBT8
Pollution degree	3	General ordering information	
Rated voltage according to UL/CSA	50 V	EAN13 code	8015747096010
IP degree of protection	IP20 without enclosure, IP65/IP66/IP68/IP69 with enclosure	eCl@ss 8.1	27440205
Further technical details		ETIM 7.0	EC000438
Characteristics according to EN 61984	10A 50V 0.8kV 3	Packaging Information	
Insulation resistance	≥ 10 GΩ	Packaging weight	0,67 kg
Contact resistance	≤ 3 mΩ	Packaging description	Carton box
Weight	7,70 g	Packaging quantity	10 Pcs
Operating temperature range (min, max)	-40°C ... +85°C	Packaging EAN code	8015747096027
UL 94 flammability rating	V-0	Sub-packaging length	185,00 mm
		Sub-packaging height	40,00 mm
		Sub-packaging width	155,00 mm
		Sub-packaging weight	0,07 kg
		Sub-packaging volume	1,15 dm³
		Sub-packaging description	Plastic bag
		Sub-packaging quantity	1 Pcs
		Sub-packaging EAN barcode	8015747096034

Part number


CX 04 BM



Catalogue drawings

CX 04 BF

CX 04 BM

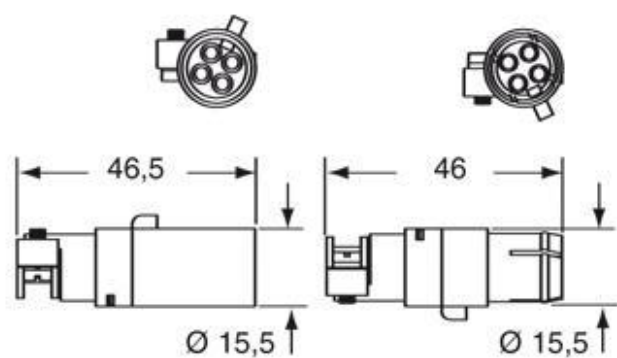

Notes

Dimensions shown in mm are not binding and may be changed without notice.