


Field-wireable, M12, male, straight, 4 poles, cable-entry 2-way, screw-/clamp contact, 250V 4A




Product data

Item description	FSMC4K
Item-No.	8017231
Customs tariff-No.	85366990
Step-File	FSMC4K.stp
EAN	4047106065355

Technical data

Connector	male, Duo sealed, straight, M12
Number of pins	4
Coding	A
Rated voltage	250V
Current load per pin (at 40°C)	4A
Insulation resistance	$\geq 10^9 \Omega$
Resistance	$\leq 8 m\Omega$
Ambient temperature product	-40°C...+85°C
Contact material	Metal, CuZn, CuSnZn
Contact-carrier material	Plastic, PA, BK
Grip body material	Plastic, PA, BK
Connecting cross-section	0.75 mm ² AWG18
Cable outlet	2 x Ø 2,1-3 mm Ø 4-5 mm
Connecting type	Screw-/clamp contact
Standards	IEC 61076-2-101
Degree of protection (mounted)	IP67
Mechanical life-cycle	>50 mating cycles
Degree of pollution	3
Style	straight

Manual

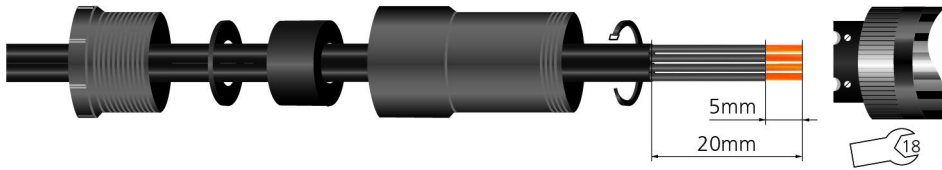

Classification

eCl@ss 6.0	27260702
eCl@ss 7.0	27440102
eCl@ss 8.0	27440102
eCl@ss 9.0	27440102
ETIM 5.0	EC002635
ETIM 6.0	EC002635

Link to product

<https://www.escha.net/en/products/standard/field-wireable-connectors/8017231>